



Features:

- **UL 1449 Third Edition Listed (Sept 2009)**
- **80kA, 120kA & 160kA per phase ratings**
- **Type 2 SPD –**
 - All UL required OCP & Safety Coordination included inside
 - Can be installed load-side of main disconnect
- **Replaceable module construction**
- **200kA SCCRs**
- **Voltage Specific Design – Highly configurable**
- **MOV suppression elements monitored**

Performance Specifications

- **Surge Capacities**

	L-N	N-G	
80kA/phase	80kA	80kA	Standard
120kA/phase	120kA	120kA	Optional
160kA/phase	160kA	160kA	Optional
- UL 1449 Third Edition Listed, UL 1283 and cUL
- UL 1449-3 Type 2 SPD
- UL 1449-3 tested SCCR: 200kA
- UL 1449-3 Voltage Protection Ratings (VPRs):
 - 208Y/120V: as low as 600V
 - 480Y/277V: as low as 1000V
- Less than 1 nanosecond response time
- Repetitive Impulse: 5,000 hits
- AC Sinewave Tracking Filter with EMI/RFI Filtering up to -50dB from 10kHz to 100MHz

Diagnostic Monitoring

- Green LED Status indicator per phase
- Redundant monitoring LEDs on modules
- Phase Loss monitoring (toggles LED & dry contacts)
- Electrically isolated circuitry ensures surges do not damage diagnostics
- Optional Form C Dry Contacts, 240V, 5A (two sets)

Design Features

- Designed, Manufactured & Tested consistent with:
 - ANSI/IEEE C62.41.1-2002, C62.41.2-2002, and C62.45-2002
 - NEMA LS-1
 - NEC Article 285
 - IEC 61643
- High Energy Parallel Design for Category C3 & C-High applications
- For External Mounting next to Switchgear, Motor Controls Centers or Panelboards
- Individually Fused Suppression Modules
- Large-Block 34mm square MOVs
- Replaceable Phase Module Construction
- Thermal Cutout in Each Mode
- Busbar Construction
- Solid State Bidirectional Operation
- Enclosure-less version for OEM available

Physical Specifications

- Relative Humidity Range: 0 -95% non-condensing
- Operating Frequency: 47-63Hz
- Operating Temperature: -25°C (-15°F) to +60°C (140°F)
- Weight: 25 lbs (11.4 kg)
- Standard NEMA 1/12/3R/4 enclosure
- Standard size: 12" x 12" x 7.5" (30.5cm x 30.5cm x 19cm)
- Lug size: #1/0 - #14 AWG
- Typical connection: #6 AWG and 60A breaker

Quality, Standards & Validation

- UL 1449 Third Edition, cUL, UL 1283
- UL file: VZCA.E321351 at www.UL.com
- RoHS-compliant
- IEC 61643, CE
- 10 year warranty (longer optional)
- Burn-In tested Prior to Shipment
- ISO 9001:2008 Quality Management System
- ISO 17025:2005 Laboratory Qualification
- Made in USA



TE/HPS MODEL NUMBER CONFIGURATOR & OPTIONS



TE = Transient Eliminator, Listed Type 2 SPD in NEMA 1/3R/04/12 enclosure

XTE = Transient Eliminator, Recognized Type 4 SPD on backplane for installation within gear in Type 2 installation (display on 6' cable)

Voltage Code for Electrical System

- Common North American Systems:**
- 1 = 240/120V Split Phase - 1Ø 3W+Grnd (Fig 1)
 - 2 = 208Y/120V Wye - 3Ø 4W+Grnd (Fig 2)
 - 3 = 240/120V High Leg Delta (B High) (Fig 3)
 - 4 = 480Y/277V Wye - 3Ø 4W+Grnd (Fig 2)
 - 5 = 480V Delta - 3Ø 3W+Grnd (Fig 4) & HRG Wye
 - 8 = 600Y/347V Wye - 3Ø 4W+Grnd (Fig 2)

Other Available Systems - Confirmation encouraged:

- 11 = 120V Single Phase - 1Ø 2W + Grnd (Fig 5)
- 12 = 240V Single Phase - 1Ø 2W + Grnd (Fig 5)
- 51 = 480V B Corner Grnd Delta, 3Ø 3W+Grnd (Fig 6)
- 6 = 240V Delta - 3Ø 3W+Grnd (Fig 4)
- 61 = 240V B Corner Grnd Delta, 3Ø 3W+Grnd (Fig 6)
- 7 = 380Y/220V Wye - 3Ø 4W+Grnd (Fig 2)
- 9 = 600V Delta - 3Ø 3W+Grnd (Fig 4) & HRG Wye
- 91 = 600V B Corner Grnd Delta, 3Ø 3W+Grnd (Fig 6)

Model Family

HPS = HPS Family 80kA rating standard

Option Suffixes (Seperated by slashes -/)


- CX = 120kA Option
- CL = 160kA Option
- DC = Dry Contacts
Two sets Form C on terminal strip
- FM = Flush Mount enclosure, NEMA 1 only
(wall cavity size: 12"x12"x6" deep)

Available Accessory (order seperately):
RM = Remote Monitor

Enclosure Rating

- 04** = Standard: NEMA 1/3R/04/12 (size: 12" x 12" x 7.5")
- FM** = Flush Mount Enclosure, NEMA 1 only
(wall cavity size: 12" x 12" x 6")
- 4X** = NEMA 4X Non-Metallic (size: 14" x 12" x 6")
(polycarbonate, display inside clear front door)
- 4S** = NEMA 4X Stainless Steel (size: 12" x 12" x 6")
(display inside door)

(Note: Enclosure-less version for OEM uses XTE prefix)

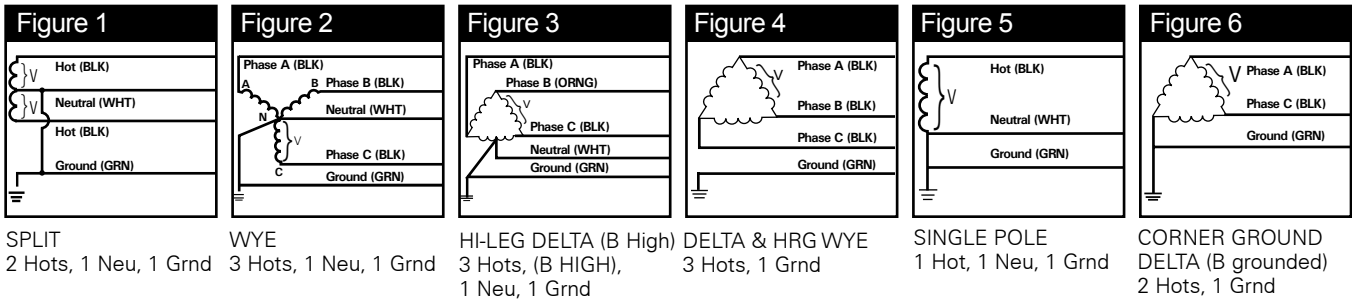

Performance Data

Common North American Systems		UL 1449 THIRD Edition (Sept 2009) Test Data						
		Voltage Protection Ratings (VPR - 3kA)						
		L-N	N-G	L-L	Type	In	SCCR	MCOV
01	= 240/120V Split Phase	800	600	1200	Type 2	5kA	200kA	150
02	= 208Y/120V 3Ø Wye	800	600	1200	Type 2	5kA	200kA	150
03	= 240Y/120V B High Leg Delta	800/1200	600	1200	Type 2	5kA	200kA	150 / 320
04	= 480Y/277V 3Ø Wye	1200	1000	1800	Type 2	5kA	200kA	320
05	= 480V 3Ø Delta	—	—	1800	Type 2	5kA	200kA	550
08	= 600Y/347V 3Ø Wye	1500	1200	2500	Type 2	5kA	200kA	420

Other Available Systems:

Please see supplementary data sheet, contact us at info@aptvss.com, or confirm at www.UL.com using CCN of VZCA

Advanced Protection Technologies
14550 58th Street North · Clearwater, Florida 33760
(800) 237-4567 · (727) 535-6339 · Fax (727) 539-8955
www.aptvss.com · info@aptvss.com

