


# AC Power / DIN Rail

## Three Phase/ Series / 3-Pole

### IEC Class II /IEEE Category C, B, A

The AC Power DIN Rail mounted AC Surge Protectors are designed for downstream load protection. These are series connected devices, housed in UL 94V-0 thermoplastic enclosures. Each device includes internal thermal disconnects and visual failure mode status indicators with optional relay contacts.

These devices are intended for use in IEC Class II, UL 1449 Type 2, Type 4, and IEEE Category C, B & A load applications.

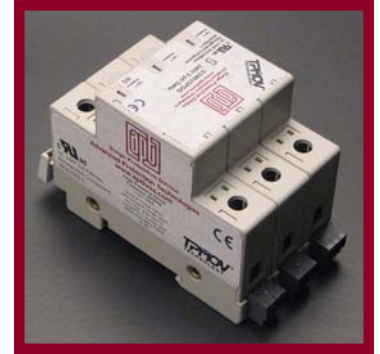

**Branch Applications / Robotics / Automation / AC Power / Communications / Critical Power**

#### Technical Data

Model Series	AC - Power
Suppression Technology	TPMOV®
Surge Current Rating	50kA per mode
Degree of Protection	IP 20 / IP 65
Short Circuit Rating	200,000A rms
Enclosure Material	Thermoplastic V-0
Mounting Type	DIN 3 Rail / 35mm / 1 TE
Conductor Sizing	#6 - #14 AWG
UL Recognized (UR)	Yes - UL1449
IEC / CE Compliance	Yes / 61643-1
IEEE Category Rating	C, B & A
I <sub>max</sub> (8x20μs)	50kA
I <sub>n</sub> (8x20μs)	20kA
Frequency Rating	50/60Hz
Temperature Rating	-40°C to +85°C
Warranty	5 yr

#### Approval Standards

- RoHS Compliant
- UL 1449 Third Edition
- ANSI/IEEE C62.41
- IEC 61643
- NEMA LS-1
- CE Mark

#### Application & Ratings


- Type 2, 4 Locations
- Surge Life @ 3kA: 5000 events
- Surge Life @ 10kA: 1000 events

**EXTERNAL FUSE NOT REQUIRED**


SEPARATE OVERCURRENT PROTECTION IS NOT REQUIRED FOR 200kA SCCR RATING.

Model	D240V3PD	D480V3PD
Voltage	240V DELTA	480V DELTA
MCOV	270V	550V
Modes	L-L	L-L
UL VPR	800V	1500V

NOTE: Add "M" to part number for dry contacts



3 Phase Delta  
3 Wire + Ground



E103120

**AP** US

Advanced Protection Technologies




14550 58th Street North  
Clearwater, FL 33760  
Tel (800) 237-4567  
Fax (727) 539-8955  
[www.apttvss.com](http://www.apttvss.com)


# Installation Instructions

## Three Pole

D240V3PD—240V 3 phase Delta  
D480V3PD—480V 3 phase Delta




3 Phase Delta  
3 Wire + Ground



## Mounting

APT DIN is designed to mount onto a 35mm DIN rail or top-hat rail (standard EN 50022, BS 5584) set in the horizontal position. To install, first hook the line side over the 35mm DIN rail and then push in the load side until the blue spring loaded mounting clip "clicks" onto the rail with the label text shown in the upright position reading left to right.

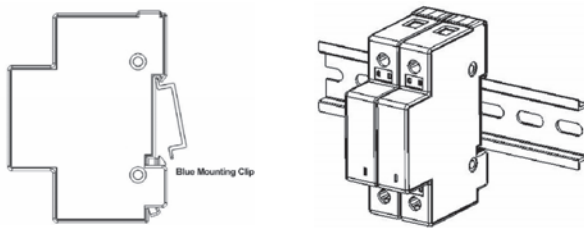

## Wiring Installation

#6-#14 AWG, 60/75°C Copper wire shall be used. Maximum torque to be applied to terminal screws is 14.75 in-lb. Strip back wire installation 6mm(1/4").



Interconnecting wire should be no longer than 500mm (20") in total length. Wire bending radius should be >100mm (4"). Do not loop or twist interconnecting wire. Failure to meet these requirements will result in higher let-through voltages.

## Auxiliary Micro-Switch Installation


Remote signaling is available on all APT DIN products that specify a remote indicator. #16-#30 AWG signal wire may be used. Maximum torque rating for the terminal screw is 1.80 in-lb. The maximum continuous current rating for the remote indicator is 3A.

## Replacement / Removal



If the blown indicator tab is visible on any of the multiple pole units, then the entire unit has reached the end of its life and must be replaced. To remove, push up on the unit and rock the top off the 35mm DIN rail.



Subminiature Switch  
125VAC - 3A max  
-25°C to 85°C  
Signal Wire Range: #16 to #30 AWG  
Terminal Torque: 1.8lb - in

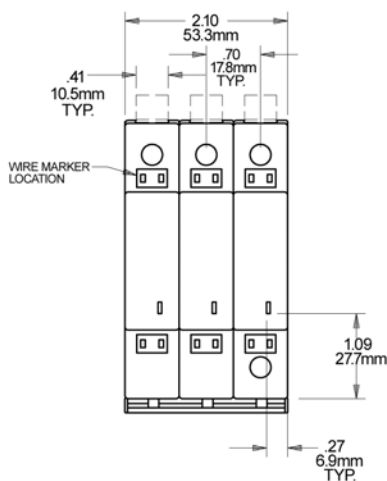

- \*\* WIRE SIZE: 6-14 AWG
- \*\* TORQUE: 14.75 LBS-IN
- \*\* USE 35mm DIN RAIL

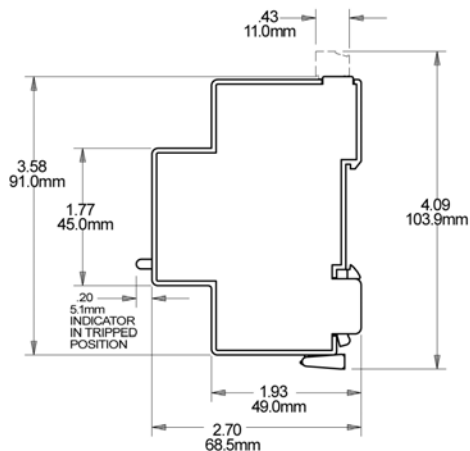

### REMOTE INDICATING SPECIFICATION

- \*\* 125VAC 3A DRY CONTACT
- \*\* TERMINAL SPACING 3.5mm
- \*\* WIRE SIZE: 16-30 AWG
- PIN CONNECTORS: 1-NORMALLY OPEN  
2-NORMALLY CLOSE  
3-COMMON

## Advanced Protection Technologies



14550 58th Street North  
Clearwater, FL 33760  
Tel (800) 237-4567  
Fax (727) 539-8955  
www.apttvss.com