

3.8" Operator Interface Plus Control



TouchPanel
Operation



3.8-inch Amber/Red LCD
Panel Computer

LT-3201

Model: LT3201-A1-D24-K, LT3201-A1-D24-C

DC 24V	3.8-inch
QVGA	

All-in-one model Built-in DIO Expansion I/O

Powered by

Screen Editor




Features:

- 3.8-inch (QVGA 320x240) Stand Alone Graphic Controller
- Ladder logic for simple machine control
- Built-in 12 discrete inputs, 6 outputs and up to 2 EXM modules
- All-in-one operator interface plus control solution reduces wiring, system cost, maintenance cost and space.
- NEMA 4X/13 Rated
- RoHS Directive-conforming

Specifications

Model	LT3201-A1-D24-K	LT3201-A1-D24-C
Graphics Display Resolution	QVGA (320 x 240 dots)	
Display Type and Size	Amber/Red LCD (3.8 inch)	
Display Colors	8 shades	
Display Area	78.8mm[3.10in.] x 59.6mm[2.35in.]	
Touch Screen	Resistive Film (Analog) Touch Screen	
DIO	Input	12 discrete points sink/source-type 24VDC. Reconfigurable as High Speed counters (up to 4 single phase 100Kpps or 2 double phase 50Kpps), Pulse Catch
	Output	6 discrete points sink-type 24VDC. Reconfigurable as pulse output or PWM (up to 65KHz per point)
USB	USB port 1.1, host I/F, USB TYPE-A connector	
I/O Expansion	Mix and Match any two EXM Modules	
Input Voltage/Rated Voltage Range	24V DC/ 19.2V DC to 28.8V DC	
Power Consumption	18W or less	
Temperature	Operating 0°C (32°F) to 50°C(122°F), Storage -20°C (-4°F) to +60°C (140°F)	
Altitude Operation	800hPa to 1114hPa (2000 meters above sea-level and below)	
Certifications	UL508, ANS/ISA-12.12.01-2007, CSA-22.2 No. 142-M1987, CSA-22.2 No.213-M1987, CE marking EN55011, EN61000-6-2. Suitable for use in Class I, Division 2, Groups A, B, C, and D. Hazardous locations or non hazardous locations.	
Humidity - Ambient/Storage	10 to 90% RH (Not condensing, wet bulb temperature: 29°C or less).	
Corrosive Gas	Free of corrosive gases	
Vibration & Shock Resistance	IEC61131-2 compliant 5 to 9Hz single-amplitude 3.5mm 9 to 150Hz constant-accelerated velocity 9.8m/s ² X, Y, Z directions for 10 cycle (100 minute)	
Rating	Equivalent to IP65f NEMA #250 TYPE 4X/13. (front surface when panel is embedded)	
Weight	Approx. 1.0kg [2.2lb] max. (unit only)	
External Dimensions	130mm [5.12in.] x 104mm [4.09in.] x 76.5mm [3.01in.]	
Warranty	Two (2) years	

I/O EXPANSION MODULES

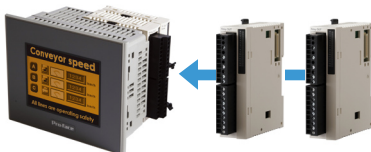

Mix and Match Any Two Modules

See EXM Module Datasheet for a full list of I/O expansion modules.

Input / Output Mixed I/O modules

- EXM-DMM8DRT** 4-point input sink-source, 4-point relay output with single common
- EXM-DMM24DRF** 16-point Inputs / 8-point Relay Output Module

Analog I/O modules

- EXM-AMI2HT** 2-point analog input type
- EXM-ALM3LT** 2-point temperature input / 1-point analog type
- EXM-AMM3HT** 2-point analog input / 1-point analog output type
- EXM-AMO1HT** 1-point analog output type
- EXM-AMI4LT** 16-point input and 8-point relay output Module
- EXM-ARI8LT** 4-point Analog Input Module
- EXM-AVO2HT** 8-point Pt100/Pt1000 Input Module
- EXM-AMM6HT** 4-point Analog Input/ 2-point Analog Output Module

For more information see EX-Module Datasheet

Input I/O modules


- EXM-DDI8DT** 8-point sink/source shared I/O Unit, DC24V input signal can be connected
- EXM-DDI16DT** 16-point sink/source shared I/O Unit, DC24V input signal can be connected

Output I/O modules

- EXM-DRA8RT** 8-point relay output with 2 commons I/O Unit
- EXM-DRA16RT** 16-point relay output with 2 commons I/O Unit
- EXM-DDO8UT** 8-point transistor output sink I/O Unit
- EXM-DDO16UK** 16-point transistor output sink I/O Unit
- EXM-DDO8TT** 8-point transistor output source I/O Unit
- EXM-DDO16TK** 16-point transistor output source type I/O unit

LT3201 - External Dimensions

Unit: mm [in.]

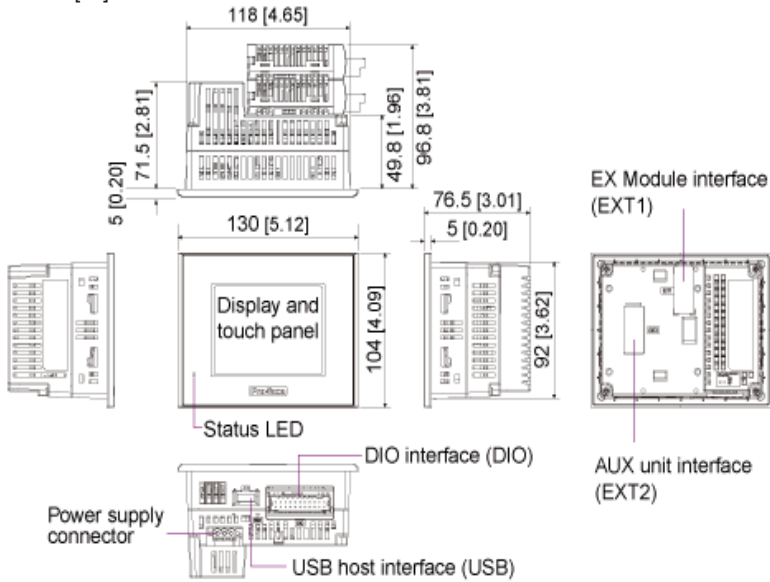

Ordering Information

Part Number	Description
LT3201-A1-D24-K	3.8" Amber/Red LCD, HMI plus Control with Discrete I/O (Sink)
LT3201-A1-D24-C	3.8" Amber/Red LCD, HMI plus Control with Discrete I/O (Source)

Optional Items


Product Name	Part Number
Software (GP-Pro EX)	EX-ED-V2.1 or later
I/O Expansion	See EX Module data sheet for list of available modules
USB Transfer Cable (1m)	CA3-USBCB-01
USB Front Cable (1m)	CA5-USBEXT-01
Screen Protection Sheet (5 sheets/set)	CA3-DFS04-01

Caution: Before operating any of these products, please be sure to read all related manuals thoroughly.

- All product names used in this document are trademarks or registered trademarks of their respective companies.
- All information contained in this document is subject to change without notice.

LT3201 - Cut-Out Dimensions

Unit: mm [in.]

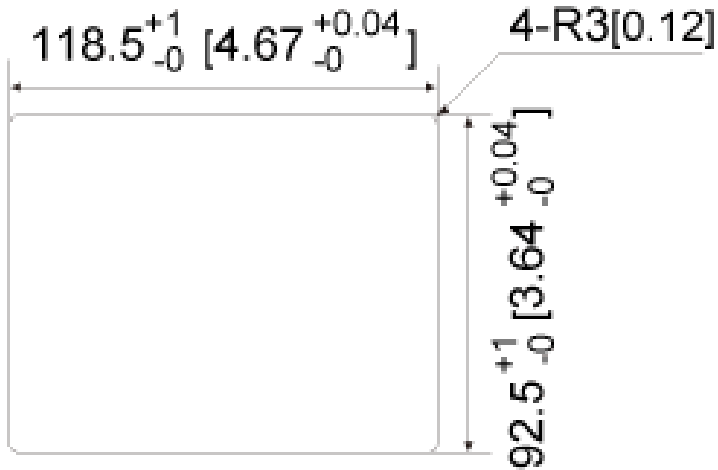

Pro-face America
Phone: 734.429.4971
Fax: 734.429.1010
www.profaceamerica.com

Customer Service Hotline: 734.944.0482

For more information
ACCESS www.profaceamerica.com